


SPLITTER BOX

PNSB



ACHIEVE MORE IN LESS TIME

The SA POWERNET EX Splitter Box safely provides four 16A socket outlets in any environment. The rugged, waterproof and dustproof design makes our box practically indestructible, and it's supplied ready for use in full 'plug-and-play' state. Available in a range of voltage options, and usually available for next-day delivery.

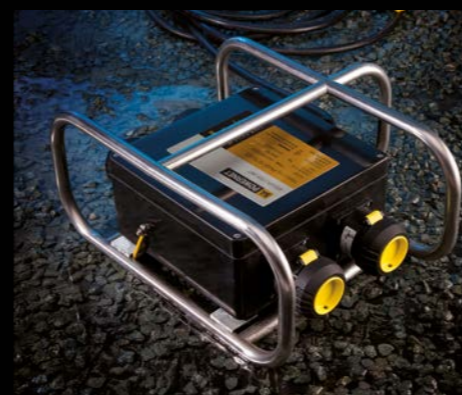

BENEFITS

- ATEX & IECEx Certified for Zones 1 and 2 (gas), 21 and 22 (dust)
- INMETRO Certified
- Tough and durable
- Fast delivery times
- Waterproof and dustproof

SPECIFICATIONS

CERTIFICATION

Ex II 2 G D
Ex db eb IIC T6 Gb
Ex tb IIIC T85°C Db

INGRESS PROTECTION

IP65 & IP66

OPERATING TEMPERATURE

-55°C to +55°C (CEAG)
-50°C to +45°C (STAHL)
-40°C to +55°C (ATX)

VOLTAGE

24VAC, 42VAC, 110VAC, 230VAC

INPUT

1 x 16A Plug

OUTPUT

4 x 16A Socket Outlets

DIMENSIONS

450mm (w) x 450mm (d) x 200mm (h)

WEIGHT

6.6kg (without cable)

CABLE LENGTH

15m (or as required)

CORE PRODUCT INFORMATION

SA POWERNET EX Splitter Unit 4-way 110V

c/w 1 x 16A CEAG plug, 4 x 16A CEAG sockets, and 15m of braided HOFBR cable
Order Code: **PNSB110/15-4EX/CEA**

c/w 1 x 16A STAHL plug, 4 x 16A STAHL sockets, and 15m of braided HOFBR cable
Order Code: **PNSB110/15-4EX/STA**



SA POWERNET EX Splitter Unit 4-way 230V

c/w 1 x 16A CEAG plug, 4 x 16A CEAG sockets, and 15m of braided HOFBR cable
Order Code: **PNSB230/15-4EX/CEA**

c/w 1 x 16A STAHL plug, 4 x 16A STAHL sockets, and 15m of braided HOFBR cable
Order Code: **PNSB230/15-4EX/STA**



ATX connectors and different cable lengths also available – please contact SA Equip for more details.

