

SA LUMIN


LED AREA LIGHT

SAAL25/FR



HIGH POWERED 25,000 LUMEN LED AREA FLOODLIGHT

With superior lumen output, robust construction and secure fixing systems, our SA LUMIN LED Area Light provides a **light output of 25,000 lumens yet draws only 300 watts**. Utilising high power LED technology to efficiently illuminate large work areas in hazardous environments. The extremely adjustable light head with secure positioning bolt enables **multiple lighting angles** to be achieved. It is built to be either floor standing or securely attached to scaffolding using the integrated scaffold clamp.

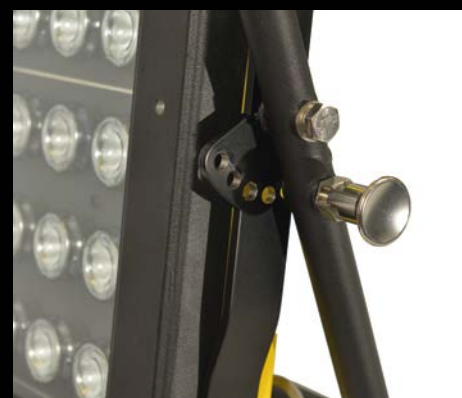

BENEFITS

- ATEX & IECEx certified for Zones 1 and 2 (Gas)
- Light output 25,000 lumens
- -50°C to +50°C Operating Temperature (Based on Plug Type)
- Easily adjustable light head with secure positioning bolt
- Colour temperature 6000K+
- Beam Angle: 30° x 30°
- IP66 protected
- Toughened glass lens
- Durable construction
- Easy to move and carry
- Floor standing or securely fixes to scaffolding
- 5 year product warranty

SPECIFICATIONS

CERTIFICATION

Ex II 2 G D
EX db eb mb op is IIB T4 Gb
EX tb op is IIIC T104°C Db

INGRESS PROTECTION

IP66

VOLTAGE OPTIONS

110VAC, 230VAC

POWER

300W

PLUG OPTIONS

ATX, CEAG, Stahl

OPERATING TEMPERATURE

-50°C to +50°C

LIGHT OUTPUT

25,000 lumens

LIGHT SOURCE

High Power LEDs

DIMENSIONS

460mm x 385mm x 850mm

WEIGHT

27.3kg (Excluding cable and plug)

CORE PRODUCT INFORMATION

SA LUMIN EX LED Area Light 110V
c/w CEAG plug and 20m of braided cable
Order Code: SAAL25-110/FR/CEA/20HRE



SA LUMIN EX LED Area Light 230V
c/w CEAG plug and 20m of braided cable
Order Code: SAAL25-230/FR/CEA/20HRE



Different combinations of plugs and cable lengths also available – please contact SA Equip for more details.



LIGHT